




LANDSCAPE WALL | KEYSTONE® INTERMEDIATE II

KEYSTONE
INTERMEDIATE

Enhance the beauty of your landscape with Keystone's Intermediate II wall system. Perfect for DIY and contractor alike, the 6-inch wall system allows for a wide range of design possibilities for any outdoor space. The rewards of installing Keystone Intermediate II will last for many years.

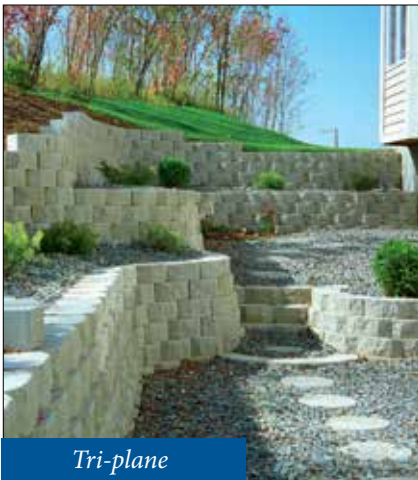

Tri-plane



Straight Split



Tri-plane



Straight Split

Unit Dimensions:
6" h x 16" w x 10" d

Unit Weights:
Tri-plane: 61 lbs
Straight Split: 66 lbs

Exposed Face Area: .67sq.ft per unit

Setback: 1 1/8"

AVAILABLE COLORS



Bedrock Blend



Split Rock Blend



Cocoa Brown



Glacier Gray



Golden Wheat

FEATURES & BENEFITS

Perfect For:

- Gravity walls up to 3' (0.9m) high
- Tiered walls
- Planters
- Tree rings
- Garden borders

Installation & Versatility

- Easy to handle, the unit's interlocking rear lip design requires no special tools for installation.
- Build to fit the contours of your yard by creating straight, curved or terraced walls.

Beauty and Performance

- The beauty of quarried stone combines with earth tone color blends to enhance any landscape.
- High-strength concrete blocks create a durable project that is virtually maintenance-free.

Note: Unit color, dimensions, weight & availability varies by manufacturer.

LANDSCAPE WALL | KEYSTONE® INTERMEDIATE II

KEYSTONE INTERMEDIATE

INSTALLATION INSTRUCTIONS



1. Prepare Wall Location

At wall location, dig shallow trench for wall base (see Typical Intermediate II Section). Place granular leveling pad material. Compact and level the base pad. Place and level the first course units. If grade changes along base of wall, create stepped leveling pad as required. Always start wall at lowest elevation, working to highest. Complete base course before proceeding with additional courses.



2. Place & Compact Backfill

Backfill first course units with clean granular fill material (i.e. crushed stone/gravel). DO NOT USE PEA GRAVEL! Compact with hand tamper or appropriate mechanical compactor. Backfill and compact behind each course before installing additional courses.



3. Install Additional Courses

Starting at straight wall area, place units centered over joint of units below to form a running bond pattern. Build through curves in similar manner.



Remove Edges

To remove outside lugs or edges of retaining lip, hold unit securely or place at angle on ground. Strike the lug firmly with a hammer. Always wear safety glasses to protect eyes from chips.



Building Curves

Curves as small as 3' (0.9m) in radius can be built with Keystone Intermediate II. Convex & concave course bonding will adjust sideways. If stack bond occurs, remove rear interlock lip as shown or cut units accordingly to get back to running bond.

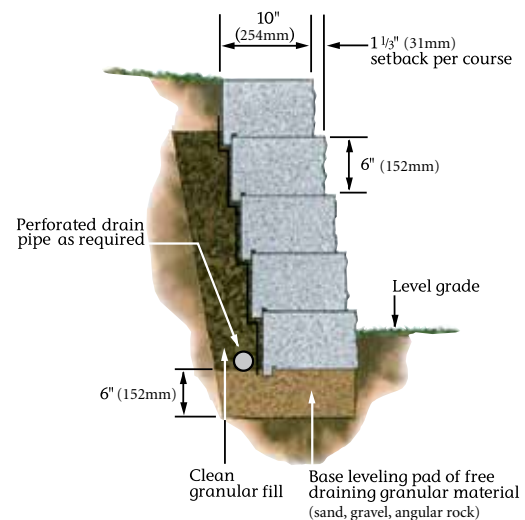

Typical Intermediate II Section

Use clean granular backfill such as gravel or crushed stone for drainage and to prevent soil from leaching through the wall. A commercial filter fabric (stocked by most garden supply stores) may be used when existing site soils are used for backfill.

Manufactured By:



amconconcreteproducts.com



FOLLOW US [f](#) [v](#) [p](#) [i](#) [n](#)

www.keystonewalls.com

©2020 Keystone Retaining Wall Systems LLC